

DECKING SPECIFICATION TABLE

Pioneer

REAL WOOD REPLICATED IN A REINFORCED PVC COMPOSITE




Image	Profile	Description	Cap material	Dimensions	Lengths	Mass (kg/m)	Coverage (m/m ²)	Span	Fastener type	Fasteners /m ²	Slip rating
		PIONEER Grooved profile	Polymer wear layer	145 x 21 mm	5450 mm	2.2	6.7	450 mm	Chain collated clips	16 clips	P4
		PIONEER Starter board profile	Polymer wear layer	145 x 21 mm	5450 mm	2.4	6.7	450 mm	Chain collated clips and face fasteners	16 Clips and 16 screws	P4

Apex PLUS

REINFORCED, CAPPED BAMBOO-PVC COMPOSITE




Image	Profile	Description	Cap material	Dimensions	Lengths	Mass (kg/m)	Coverage (m/m ²)	Span	Fastener type	Fasteners /m ²	Slip rating
		APEX PLUS Grooved profile	Engineered acrylic polymer	190 x 24 mm	5450 mm	3.8	5.1	450 mm	Chain collated clip	13 clips	P5
		APEX PLUS Square edge profile	Engineered acrylic polymer	190 x 24 mm	5450 mm	3.9	5.1	450 mm	Face fastener	39 screws	P5



Before installing, scan the QR code to read and download the latest installation guides. Please visit www.eva-last.net.au for more information.

ITI WA (Perth): 08 9256 5700 | email: saleswa@iti.net.au
102-108 Bannister Rd, Canning Vale, WA 6155

Distributed by:





**LIGHTWEIGHT, CAPPED
BAMBOO COMPOSITE**




Image	Profile	Description	Cap material	Dimensions	Lengths	Mass (kg/m)	Coverage (m/m ²)	Span	Fastener type	Fasteners /m ²	Slip rating
		Infinity I-Series Grooved profile	Engineered polymer	135 x 25.4 mm	5450 mm	2.8	7.1	450 mm	Chain collated clips	18 clips	P2
		Infinity I-Series Starter board	Engineered polymer	135 x 25.4 mm	5450 mm	2.7	7.1	450 mm	Chain collated clips	18 Clips and 18 screws	P2
		Infinity fascia profile	Engineered polymer	150 x 12 mm	4800 mm	2.3	6.7	400 mm Vertically only	Face fastener	36 screws	N/A
		Infinity screen profile	Engineered polymer	70 x 16 mm	5450 mm	1.4	13.2	450 mm spans up to the N5 wind speed category	Face fastener	60 screws	N/A



Before installing, scan the QR code to read and download the latest installation guides. Please visit www.eva-last.net.au for more information.

ITI WA (Perth): 08 9256 5700 | email: saleswa@iti.net.au
102-108 Bannister Rd, Canning Vale, WA 6155

Distributed by:



Image	Profile	Description	Material	Gap	Timber fastener	Metal fastener	Qty/pack	Coating	Colour	Comments
		CHAIN collated clip and screw for timber frames	Polymer coated stainless steel	6 mm	✓	-	150	PE polymer	Black	-
		CHAIN collated clip and screw for metal frames	Polymer coated stainless steel	6 mm	-	✓	150	PE polymer	Black	-
		CHAIN T15 Bit	-	N/A	N/A	N/A	2	-	Silver	Sold separately.
		CHAIN hand tool	Stainless steel	N/A	N/A	N/A	2	Powder coated	Black	Hand tool sold separately. T15 Bit included.
		Composite decking screw (CDS)	Stainless steel (SS316)	N/A	✓	-	75	Zinc-epoxy coating	Range of colours	TX20 Bit included
		Metal frame decking screw (MDS)	Carbon steel (C1022)	N/A	-	✓	75	Zinc-epoxy coating	Range of colours	TX20 Bit included









Before installing, scan the QR code to read and download the latest installation guides. Please visit www.eva-last.net.au for more information.

ITI WA (Perth): 08 9256 5700 | email: saleswa@iti.net.au
102-108 Bannister Rd, Canning Vale, WA 6155

Distributed by:



HULK FASTENERS.

COLOUR	PIONEER	APEX PLUS	INFINITY
 LIGHT GREY	-	-	Caribbean Coral
 DARK GREY	-	Alsakan Driftwood	Cape Town Grey
 BEIGE	Blackbutt Natural Blackbutt	Himalayan Cedar	-
 TAN BROWN	Spotted Gum	-	-
 LIGHT BROWN	-	Hawaiian Walnut	Oasis Palm Spanish Saffron
 BROWN	-	-	Tiger Cove



Before installing, scan the QR code to read and download the latest installation guides.
Please visit www.eva-last.net.au for more information.

ITI WA (Perth): 08 9256 5700 | email: saleswa@iti.net.au
102-108 Bannister Rd, Canning Vale, WA 6155

Distributed by:





ADVANCED BAMBOO COMPOSITE CLADDING

Cross Section	Description	Cap material	Dimensions	Coverage (m/m ²)	Lengths	Mass
	Flat	Engineered acrylic polymer	163 x 24.5 mm	6.6 m/m ²	5450 mm	1.4 kg/m
	Two Grooves	Engineered acrylic polymer	163 x 24.5 mm	6.6 m/m ²	5450 mm	1.6 kg/m

Apex COLOUR OPTIONS - FLAT RANGE



Apex COLOUR OPTIONS - TWO GROOVE RANGE



Before installing, scan the QR code to read and download the latest installation guides. Please visit www.eva-last.net.au for more information.

ITI WA (Perth): 08 9256 5700 | email: saleswa@iti.net.au
102-108 Bannister Rd, Canning Vale, WA 6155

Distributed by:





NYLON ADAPTORS




Top & bottom adaptor

Side adaptor

Internal corner adaptor

External corner adaptor

ALUMINIUM TRIM PROFILES

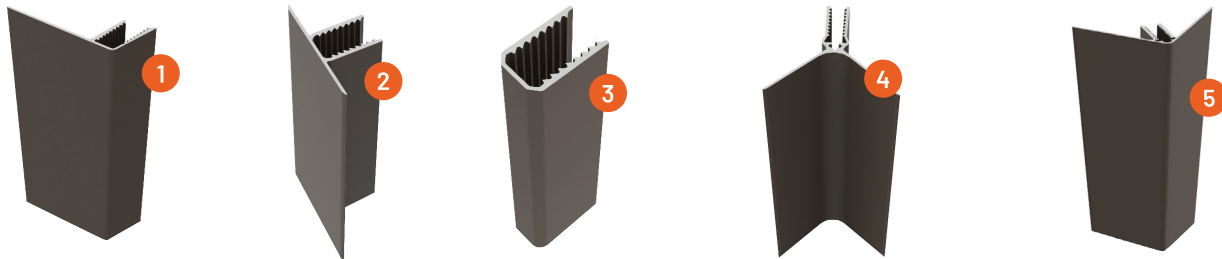

Universal trim profile
5.8 m

T trim profile
2.9 m

Minimal U trim profile
2.9 m

Internal corner trim profile
2.9 m

External corner trim profile
2.9 m

CLIP STRIPS

Image	Description	Dimensions	Weight	Colour	Screws Per Clip
	Flat Clip Strip	40 x 11.7 mm (1.8 m lengths)	0.4 kg/m	Black	24
	Top Hat Clip Strip	85.4 x 35.9 mm (2.7 m lengths)	1.2 kg/m	Black	12 at 600 centres

MATCHING TRIM COLOURS

VistaClad Colours	Matching Trim Colour	Colour Code
Charred Cedar	Black	BL
Carbonised Osage	Black	BL
Western Red Cedar	Tan Brown	TB
Swedish Oak	Light Tan	LT
Hawaiian Walnut	Brown	BR



Before installing, scan the QR code to read and download the latest installation guides. Please visit www.eva-last.net.au for more information.

ITI WA (Perth): 08 9256 5700 | email: saleswa@iti.net.au
102-108 Bannister Rd, Canning Vale, WA 6155

Distributed by:

